

ACRIWHEEL

ACRIWHEEL Art. 3008

Thickness

4.0 mm

Weight

5.8 kg/mq ca.

Format

standard 960x480 mm
on request 960x960 mm
Self-laying interlocking
puzzle cut

Packaging

Boxes of 8 plates
(equal to 3.68 m²)

ACRIWHEEL Art. 3009

Thickness

5.0 mm

Weight

7.2 kg/mq ca.

Format

standard 960x480 mm
on request 960x960 mm
Self-laying interlocking
puzzle cut

Packaging

Boxes of 6 plates
(equal to 2.76 m²)

ACRIWHEEL ULTRA Art. 3010

Suitable for forklifts

Thickness

6.0 mm

Weight

8.6 kg/mq ca.

Format

standard 960x480 mm
on request 960x960 mm
Self-laying interlocking
puzzle cut

Packaging

Boxes of 5 plates
(equal to 2.30 m²)

ACRIWHEEL ECOLIGHT and ECOGREY Art. 3008 SF



Thickness

4.0 mm

Weight

5.8 kg/mq ca.

Format

standard 960x480 mm
Self-laying interlocking
puzzle cut

Packaging

Boxes of 8 plates
(equal to 3.68 m²)

ACRIWHEEL ECOBLACK Art. 3010 SF



Suitable for forklifts

Thickness

6.0 mm

Weight

8,6 kg/mq ca.

Format

standard 960x480 mm
Self-laying interlocking
puzzle cut

Packaging

Boxes of 5 plates
(equal to 2.30 m²)

Reaction to fire:

CE class Bfl-s1

Slip resistance:

Class R9/DS (granulated)
Class R9 (solid colour)

Residual indentation:

EN 433 0.04 mm

Light fastness:

6-7 blue scale

Shore A hardness:

94 (DIN 53505)

Wear resistance:

EN 660-2 2.0/1.5 mm³

Resistance to chemicals:

good to oils, greases,
detergents, and most diluted
alkalis and acids.

Resistant to microorganisms

Like all vinyl floors, it is subject to dark marks caused by tires or any type of wheels, feet, etc. in rubber. Carry out the installation at an ambient temperature of at least 18°C, maintaining this condition for the 24 hours before and after installation.

Always check the conditions of the installation rooms with our technical office.

All the raw materials used by Sogega are purchased from qualified suppliers who comply with the REACH regulation.



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faible émission) à C (forte émission)



RICICLABILE

Compliant



Sistema Qualità ISO 9001 cert. n° 782

INVISIBLE, STRENGTH, EVIDENT RESISTANCE



ACRIWHEEL

HIGH EFFICIENCY SELF-LOCKING FLOOR



ACRIWHEEL

Acriwheel is our most innovative and successful self-locking vinyl tile flooring. It belongs to the new generation of removable floors, with a puzzle interlocking system which, once installed, is almost no longer optically perceived.

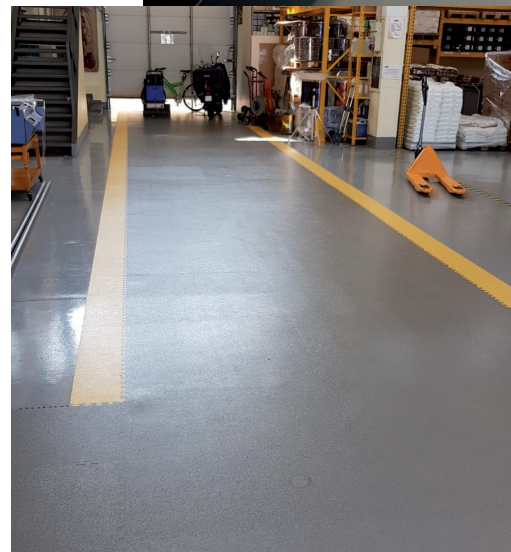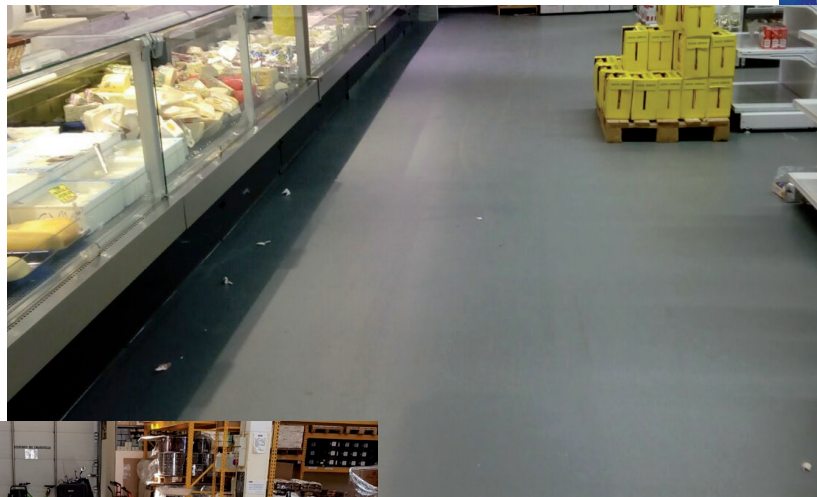


It is designed to be a free-laying system that generally does not require the use of glues. The ease of installation, the robust interlocking system, the immediate walkability, the resistance to any problems of rising damp, the absence of odor and the ease of maintenance, make this product the best solution for creating your Work.



Available in different thicknesses and types:

- **ACRIWHEEL 4.0** mm (solid color and granulated)
- **ACRIWHEEL 5.0** mm (solid color only)
- **ACRIWHEEL ULTRA 6.0** mm (solid color only), suitable for commercial and heavy industrial use (where forklifts or pallet trucks operate).

For all thicknesses

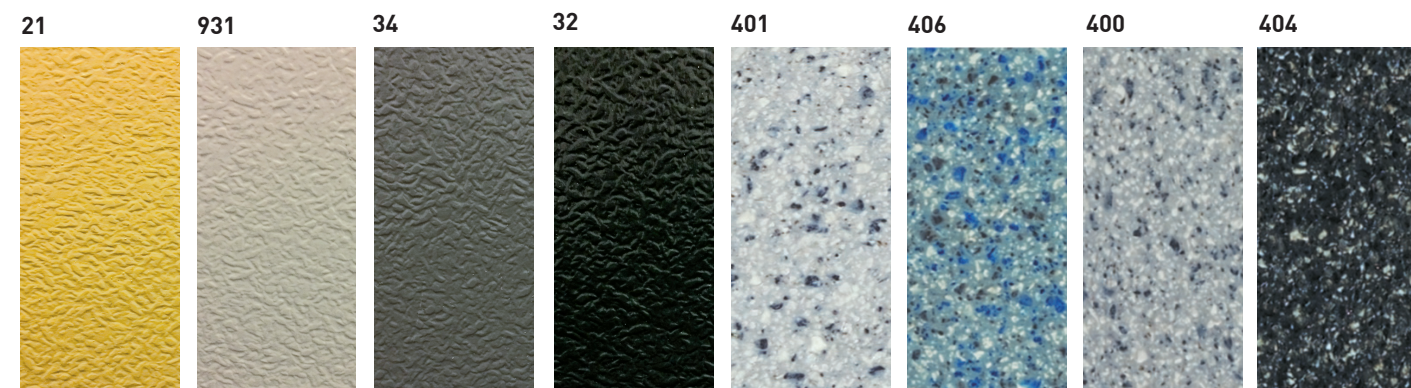

Only for thickness 4.0 mm

ACRIWHEEL ECO

The ECO family is the ecological version of Acriwheel. Made entirely of recycled PVC, it is suitable for commercial use (4mm Ecolight and Ecogrey) or heavy industrial use in the 6.0mm black Ecoblack version. The exclusive "puzzle" joint is almost invisible once installed.



The "Plastic Second Life" brand is an environmental certification system for products derived from the treatment of plastic waste recovered from separate collection and industrial waste.



PUZZLE CUT

