



IRRESISTIBLE COINS

COPRISOL

LIGHTWEIGHT FLOOR COVERING
IN PVC AND THERMOPLASTIC RUBBER,
TO BE INSTALLED WITHOUT GLUE

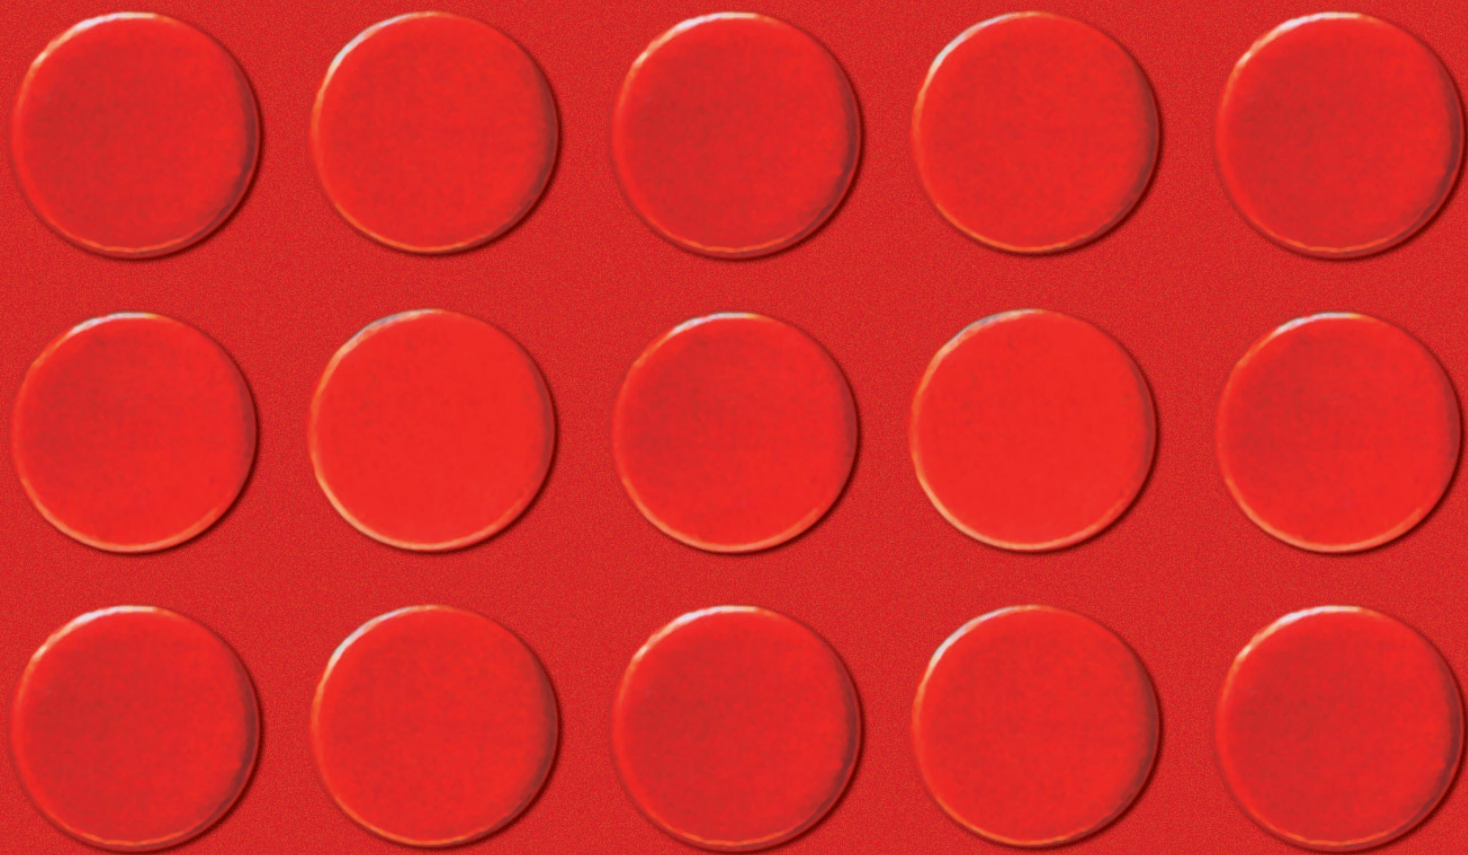


COPRISOL





Art. 385

Large coin embossing
Ø 20 mm
Height 100 cm
Thickness 1,4 mm
Length 25 mt
Colours:
333 - 334 - 347 - 380 - 390

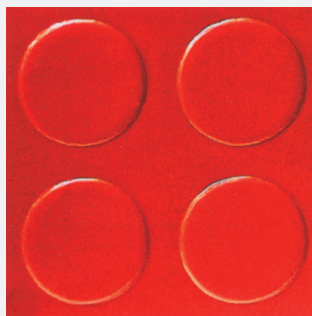


Art. 386

Large coin embossing
Ø 20 mm
Height 150 cm
Thickness 1,4 mm
Length 25 mt
Colours:
333 - 334 - 347 - 380 - 390

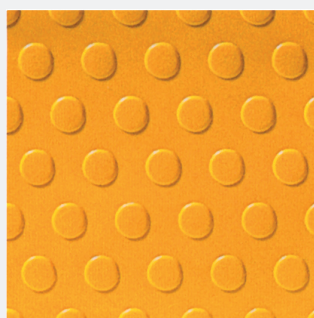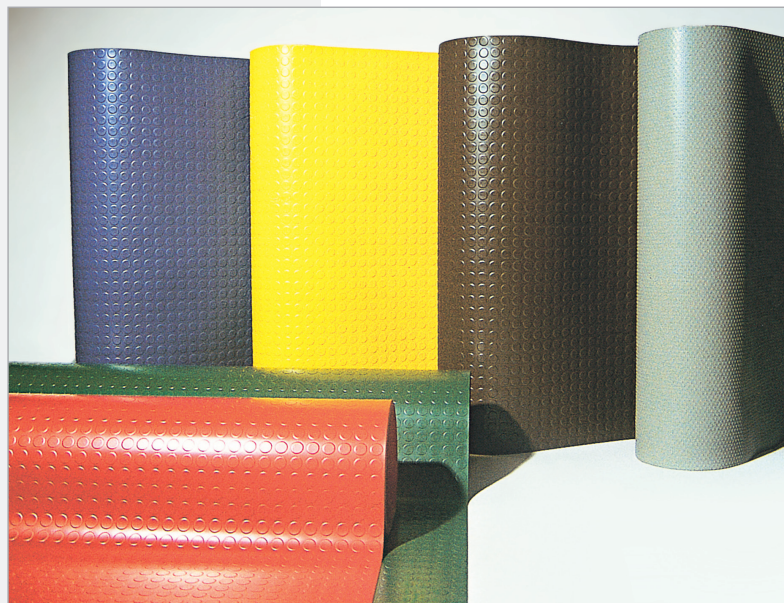

Art. 368 and Art. 391

Small coin embossing
Ø 5 mm
Height 100 cm (H. 368),
150 cm (H. 391)
Thickness 1,6 mm
Length 25 mt
Colours:
333 - 334 - 347 - 380 - 390

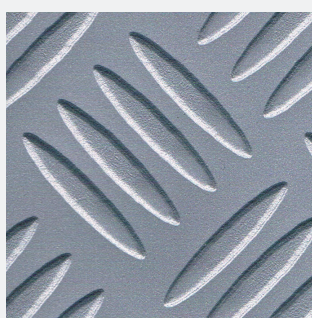

Art. 378 and Art. 379

Metal sheet embossing
Height 100 cm (H. 378),
150 cm (H. 379)
Thickness 1,6 mm
Length 25 mt
Colours: argento

Solvent resistance:

Resists most diluted acids and alkalis. Swells with aromatic and chlorinated solvents.

Resistance to mineral oils:

Good

Reaction to fire:

CE class Bfl-s1

Friction coefficient:

Class DS (Art. 385-386)

Like all vinyl floors, it is subject to dark marks caused by tires or any type of wheels, feet, etc. in rubber. Carry out the installation at an ambient temperature of at least 18°C, maintaining this condition for the 24 hours before and after installation.

All the raw materials used by Sogega are purchased from qualified suppliers who comply with the REACH regulation.

