
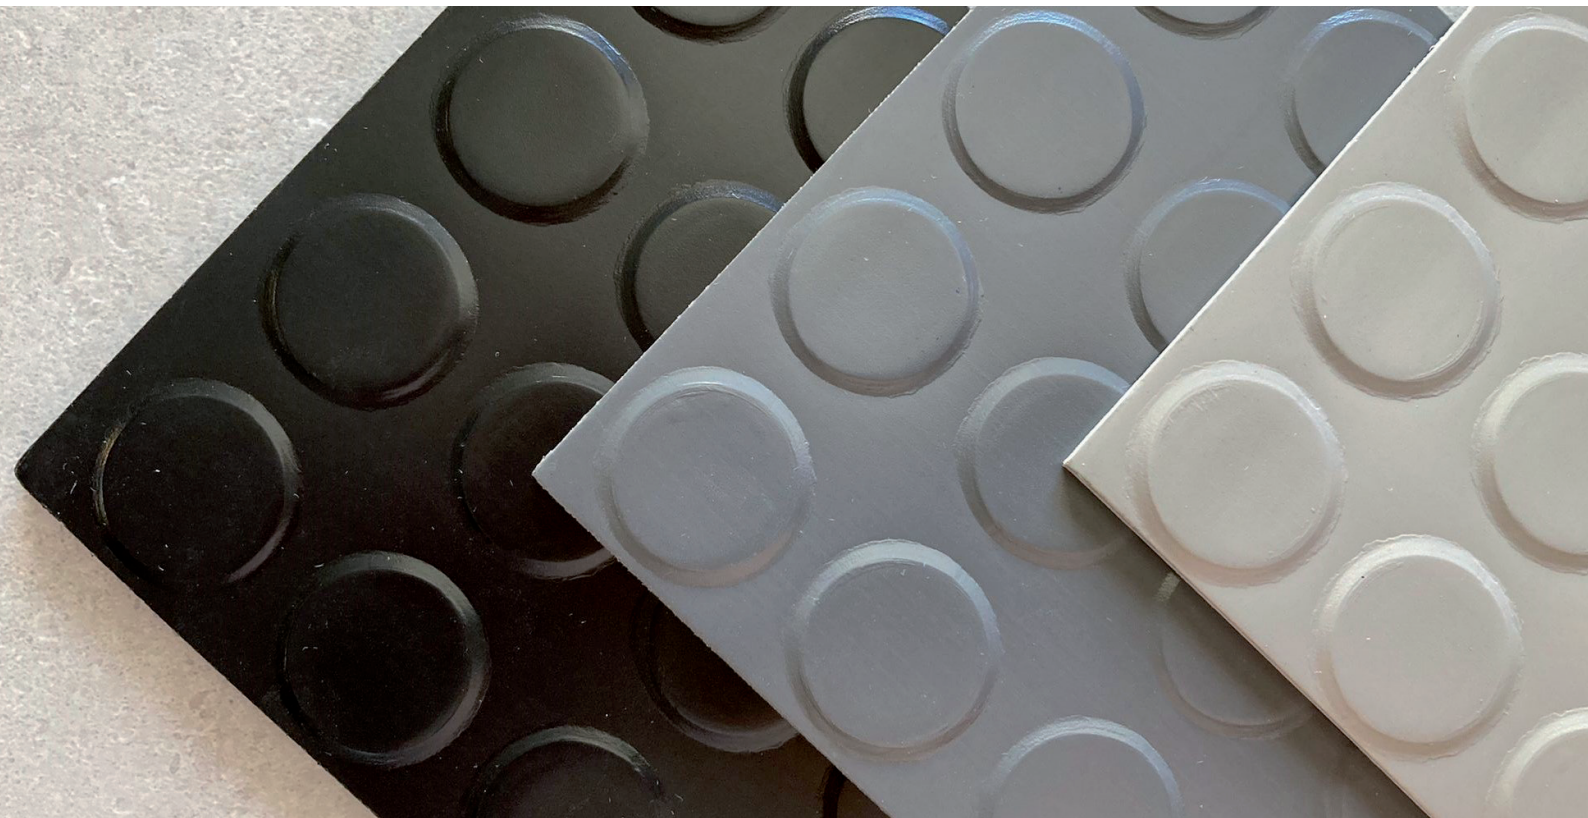



HIGH RANGE, LOW WEAR

LASTRA GOFFRATA

HIGH PERFORMANCE
PVC SHEET FOR
CIVIL AND INDUSTRIAL
FLOORING

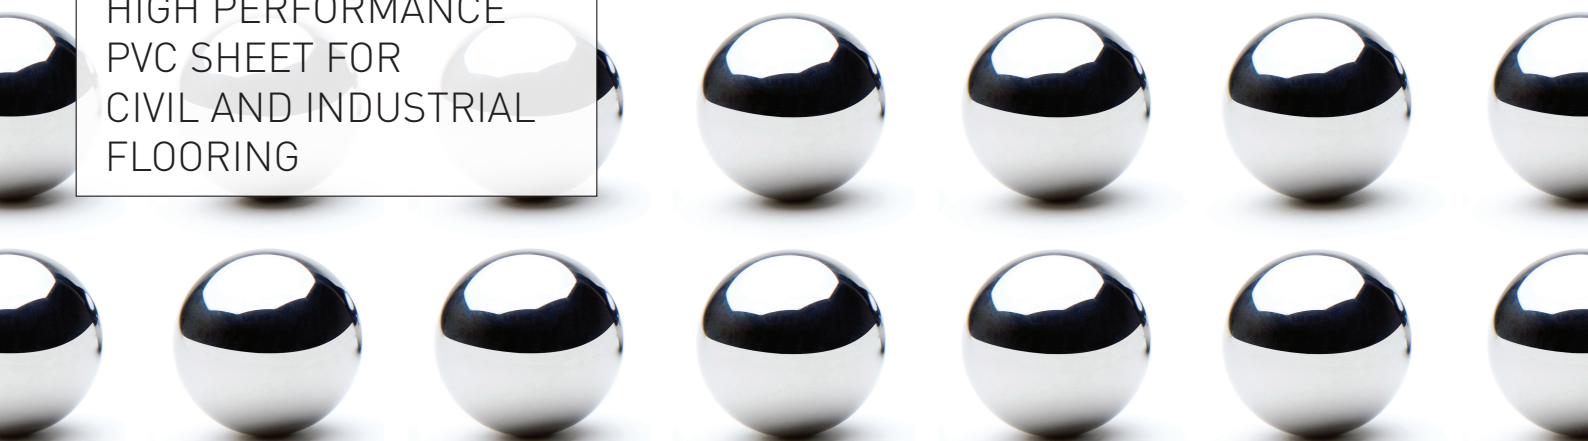

LASTRA GOFFRATA



Art. 400


Large coin embossing
Ø 20 mm
Height 98 cm trimmed
Thickness 2,5 mm
Length 20 mt
Colours: see range

Soft PVC sheet for civil and industrial flooring



Art. 401

Large coin embossing
Ø 20 mm
Height 98 cm trimmed
Thickness 3,3 mm
Length 20 mt
Colours: see range



Art. 400 SG rubber-like

Made of PVC and synthetic nitrile rubber.
Large coin embossing
Ø 20 mm
Height 150 cm
Thickness 2,5 mm
Length 15 m
Colours: 33 - 34 - 90
Suitable for outdoor use



Resistance to solvents: UNI 5574

As is: 1,3 mm
Petrol: 1,0 mm
Mineral oil SAE 20 W: 0,7 mm
Detergent (Antarox CO-360): 1,5 mm
Hydrochloric acid 10%: 1,5 mm
2% NaOH aqueous solution: 1 mm

Reaction to fire: CE class Bfl-s1

Volume resistivity:
UNI 4288: $3,8 \times 10^{+15}$ ohm-cm

Residual footprint:
UNI 5574/3.7: 0,09 mm

Friction coefficient:
Class DS - EN 13893
BCRA (Art. 400SG)

Like all vinyl floors, it is subject to dark marks caused by tires or any type of wheels, feet, etc. Rubber. Carry out installation at an ambient temperature of at least 18°C, maintaining this condition for 24 hours before and after installation.

All the raw materials used by Sogega are purchased from qualified suppliers who comply with REACH regulations.



Sistema Qualità ISO 9001 cert. n° 782